


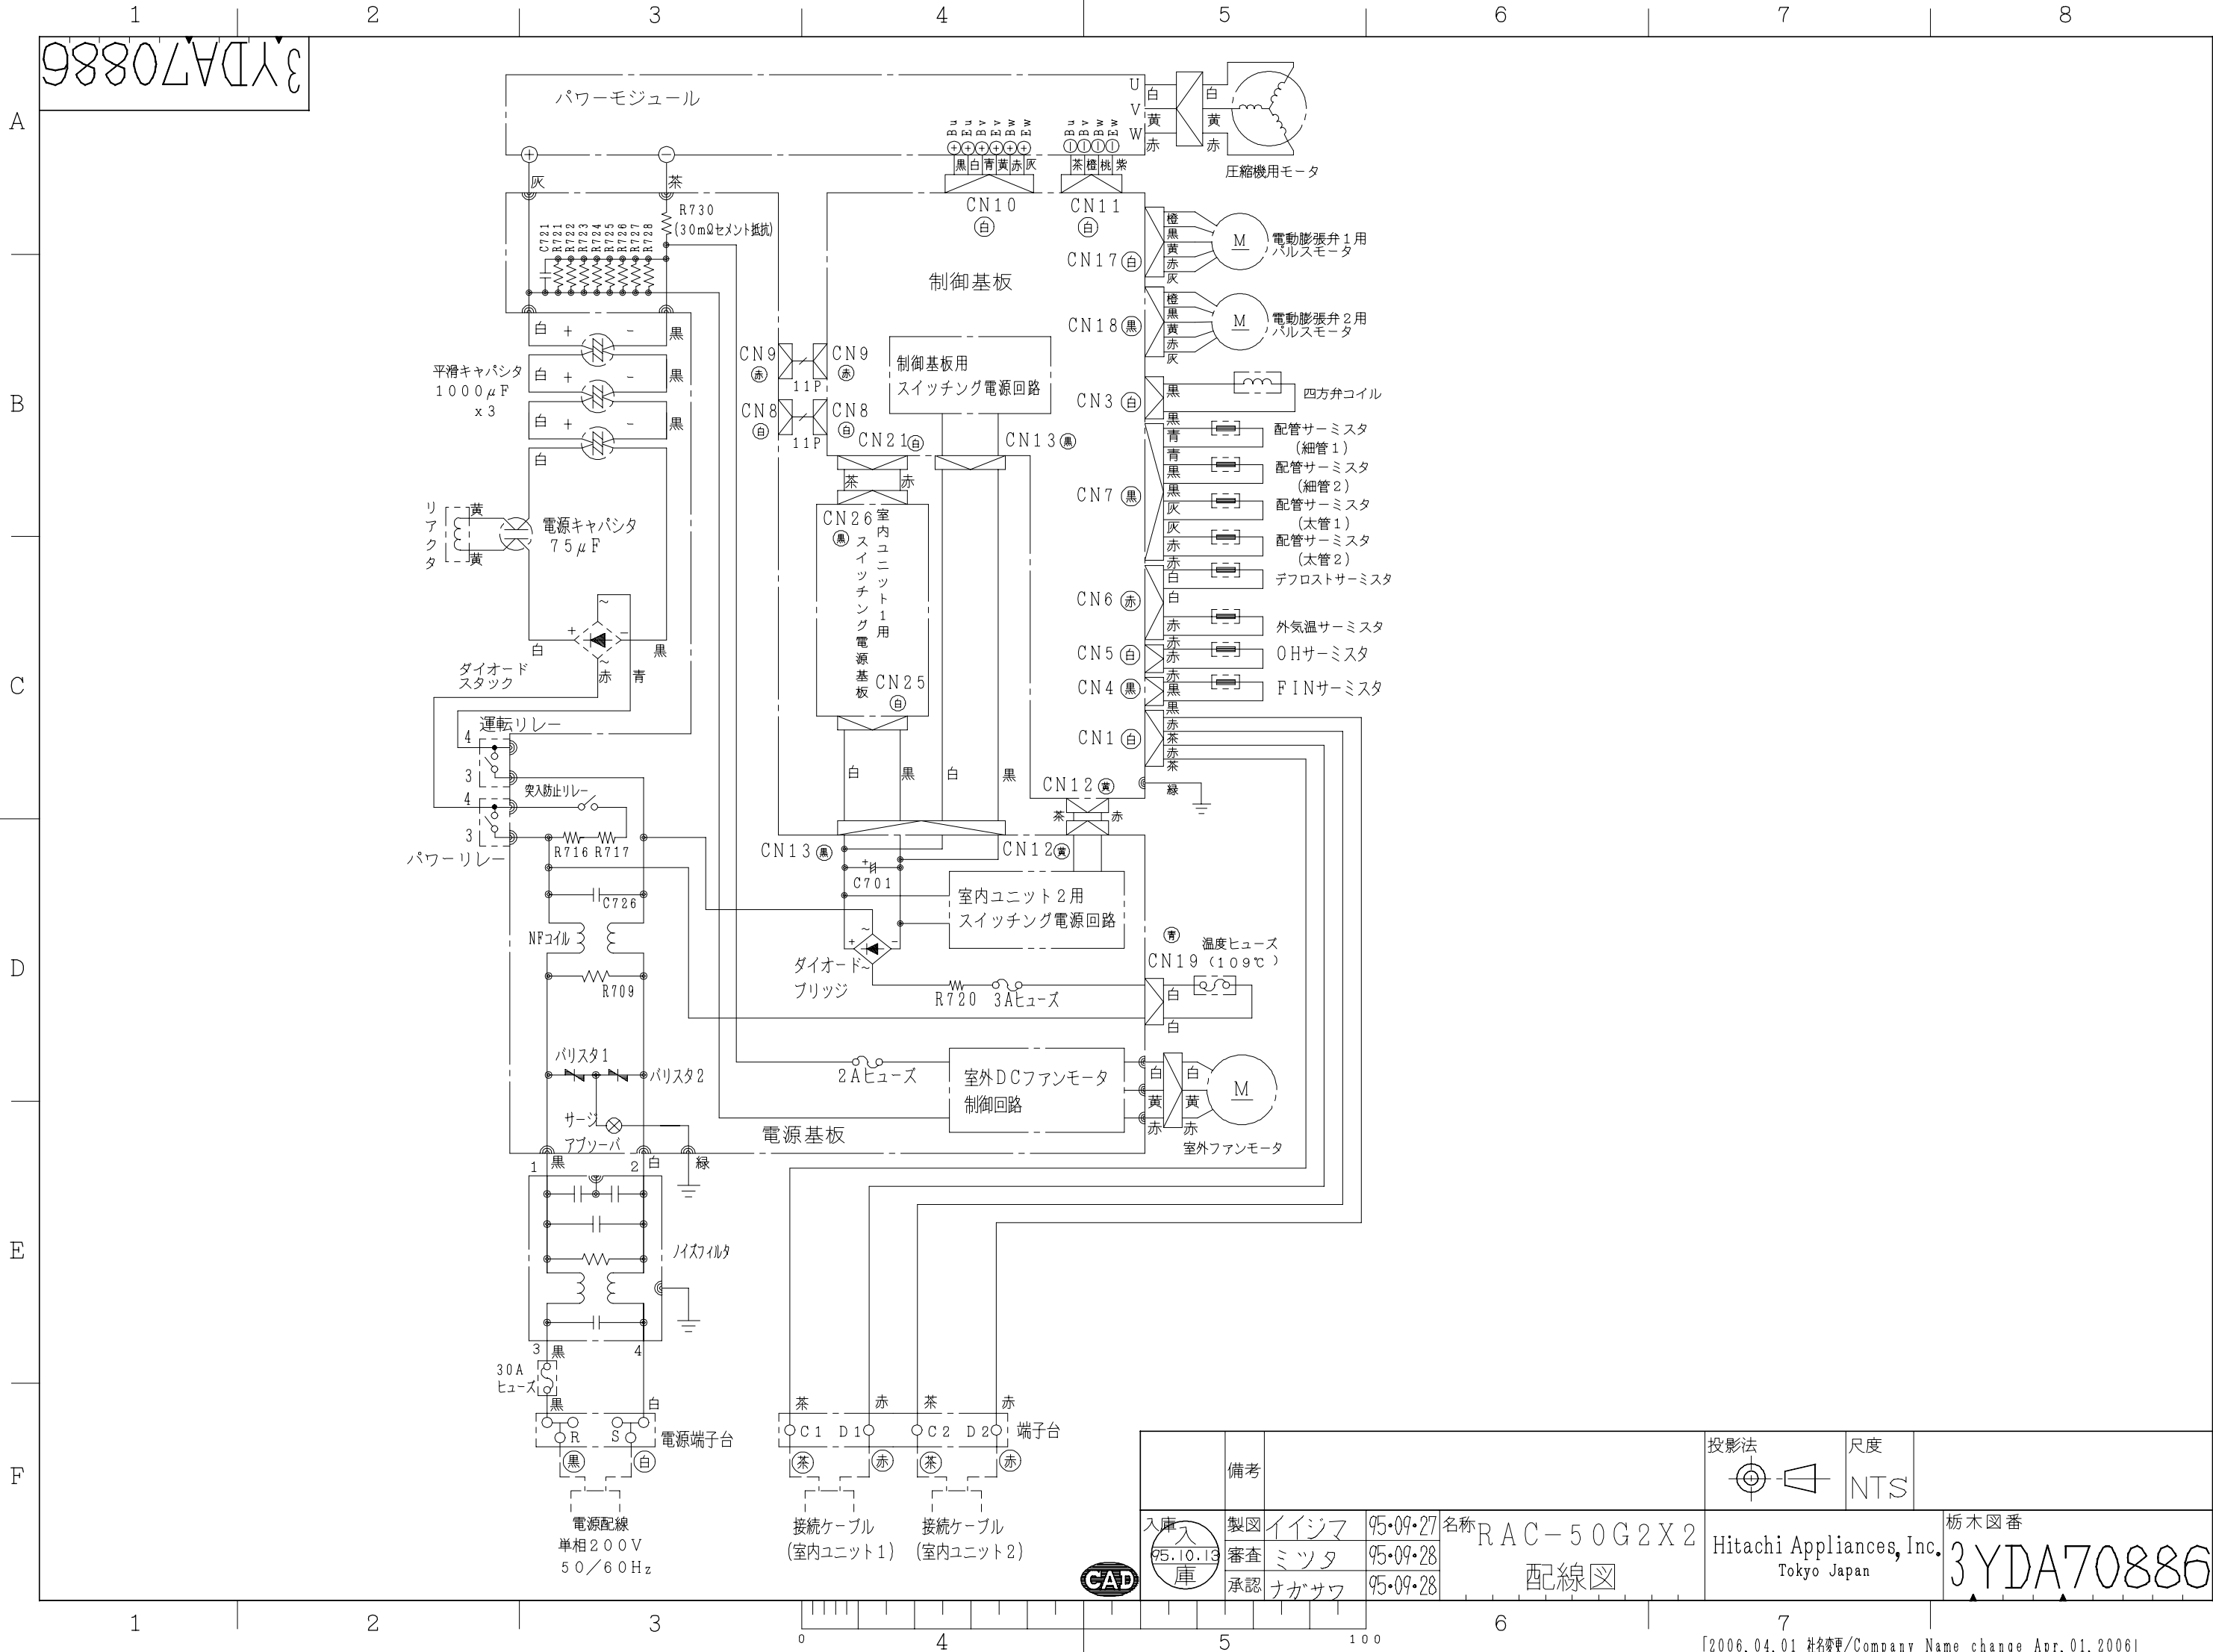

	備考			投影法	尺度	
					NTS	
入庫 95.10.13 庫	製図	イイジマ	95.09.27	名称	RAC-50G2X2	板木図番
	審査	ミツタ	95.09.28			
	承認	ナカサワ	95.09.28			

12345678

3YAA70477

● 1 台 運 転

タ イ プ			2 2 クラス	2 5 クラス	2 8 クラス	3 2 クラス	4 0 クラス
形 式			RAM-22GX	RAM-25GX RAMJ-25GX	RAM-28GX RAMJ-28GX RAMP-28GX RAMD-28GX	RAM-32GX RAMJ-32GX RAMP-32GX RAMD-32GX	RAM-40GX RAMP-40GX RAMD-40GX
冷 房	冷房能力 (kW)	定 格	2. 2	2. 5	2. 8	3. 2	4. 0
		範 囲	(1. 0~2. 5)	(1. 0~2. 8)	(1. 0~3. 2)	(1. 0~3. 8)	(1. 0~4. 5)
	消費電力 (W)	定 格	8 5 0	8 9 0	1, 0 5 0	1, 2 5 0	1, 6 5 0
		範 囲	(300~940)	(300~1, 080)	(300~1, 280)	(300~1, 480)	(300~1, 880)
運転電流 (A)			4. 7	4. 9	5. 8	6. 9	9. 2
暖 房	暖房能力 (kW)	定 格	3. 2	3. 6	4. 0	4. 5	5. 6
		範 囲	(1. 1~4. 0)	(1. 1~4. 3)	(1. 1~4. 6)	(1. 1~5. 4)	(1. 1~6. 4)
	消費電力 (W)	定 格	1, 3 0 0	1, 4 5 0	1, 6 0 0	1, 9 0 0	2, 3 0 0
		範 囲	(300~1, 600)	(300~1, 790)	(300~1, 950)	(300~2, 200)	(300~2, 650)
運転電流 (A)			7. 2	8. 1	8. 9	10. 6	12. 8

● 2 台 運 転

タ イ プ			22クラス×2台	22クラス+25クラス	22クラス+28クラス	22クラス+32クラス	22クラス+40クラス	25クラス×2台	25クラス+28クラス	25クラス+32クラス	25クラス+40クラス	28クラス×2台	28クラス+32クラス	28クラス+40クラス	32クラス×2台	32クラス+40クラス
冷 房	冷房能力 (kW)	定 格	2. 2×2	2. 2+2. 3	2. 2+2. 5	2. 1+2. 7	2. 0+3. 0	2. 3×2	2. 3+2. 5	2. 2+2. 8	2. 0+3. 4	2. 5×2	2. 4+2. 6	2. 2+3. 3	2. 65×2	2. 4+3. 2
		範 囲	(1. 0~4. 8)	(1. 0~4. 9)	(1. 0~5. 1)	(1. 0~5. 2)	(1. 0~5. 4)	(1. 0~5. 0)	(1. 0~5. 2)	(1. 0~5. 4)	(1. 0~5. 8)	(1. 0~5. 4)	(1. 0~5. 4)	(1. 0~5. 9)	(1. 0~5. 7)	(1. 0~6. 0)
	消費電力 (W)	定 格	1, 8 0 0	1, 8 7 0	1, 9 5 0	2, 0 3 0	2, 2 0 0	1, 9 5 0	2, 0 3 0	2, 2 0 0	2, 3 8 0	2, 2 0 0	2, 2 0 0	2, 4 5 0	2, 3 0 0	2, 5 0 0
		範 囲	(300~2, 120)	(300~2, 150)	(300~2, 240)	(300~2, 280)	(300~2, 430)	(300~2, 280)	(300~2, 280)	(300~2, 430)	(300~2, 550)	(300~2, 430)	(300~2, 430)	(300~2, 600)	(300~2, 520)	(300~2, 650)
運転電流 (A)			10. 0	10. 4	10. 8	11. 3	12. 2	10. 8	11. 3	12. 2	13. 2	12. 2	12. 2	13. 6	12. 8	13. 9
暖 房	暖房能力 (kW)	定 格	3. 0×2	3. 0+3. 2	2. 8+3. 6	2. 8+3. 8	2. 5+4. 7	3. 2×2	3. 2+3. 4	3. 0+3. 8	2. 8+4. 6	3. 45×2	3. 4+3. 8	3. 1+4. 5	3. 65×2	3. 4+4. 4
		範 囲	(1. 1~6. 3)	(1. 1~6. 5)	(1. 1~6. 7)	(1. 1~6. 9)	(1. 1~7. 5)	(1. 1~6. 7)	(1. 1~6. 9)	(1. 1~7. 1)	(1. 1~7. 7)	(1. 1~7. 2)	(1. 1~7. 5)	(1. 1~7. 9)	(1. 1~7. 6)	(1. 1~8. 1)
	消費電力 (W)	定 格	2, 1 3 0	2, 1 8 0	2, 3 5 0	2, 4 0 0	2, 5 2 0	2, 3 5 0	2, 4 0 0	2, 4 7 0	2, 6 0 0	2, 5 2 0	2, 5 2 0	2, 6 8 0	2, 6 0 0	2, 6 8 0
		範 囲	(300~2, 340)	(300~2, 400)	(300~2, 550)	(300~2, 600)	(300~2, 770)	(300~2, 550)	(300~2, 600)	(300~2, 660)	(300~2, 820)	(300~2, 700)	(300~2, 770)	(300~2, 870)	(300~2, 800)	(300~2, 950)
運転電流 (A)			11. 8 (MAX13. 0)	12. 1 (MAX13. 3)	13. 1 (MAX14. 2)	13. 3 (MAX14. 4)	14. 0 (MAX15. 4)	13. 1 (MAX14. 2)	13. 3 (MAX14. 4)	13. 7 (MAX14. 8)	14. 4 (MAX15. 7)	14. 0 (MAX14. 4)	14. 0 (MAX15. 4)	14. 9 (MAX15. 9)	14. 4 (MAX15. 6)	14. 9 (MAX16. 4)
RAC-50G2X2組合せ			○	○	○	○	○	○	○	○	—	○	○	—	—	—
RAC-56G2X2組合せ			○	○	○	○	○	○	○	○	○	○	○	○	○	○

● R A C - 5 0 G 2 X 2は室内機の合計能力6. 2 kW以下、R A C - 5 6 G 2 X 2は室内機の合計能力7. 2 kW以下の組合せが可能です。
● 本仕様は予告なく変更することがあります。

備考

投影法
NTS
尺度

NTS

入庫
95. 7. 6
庫

製図
イイジマ
ミツタ
ナカサワ

95・07・05
95・07・05
95・07・05

名称
インバーターマルチ システム50, 56
能力・電気特性

Hitachi Appliances, Inc.
Tokyo Japan

栃木図番
3YAA70477

12345678

0100

2006. 04. 01 社名変/Company Name change Apr. 01, 2006